
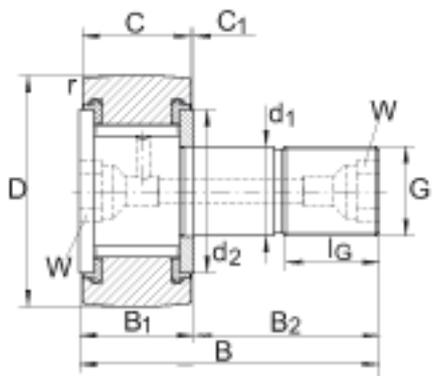


INA KRV22-PP参数

尺寸	D	22	mm	-	
	d_1	10	mm	公差:h7	
	B	36	mm	-	
	$B_{1 \max}$	13.2	mm	-	
	B_2	23	mm	-	
	C	12	mm	-	
	C_1	0.6	mm	-	
	d_2	17.5	mm	-	
	G	M10x1		-	
	I_G	12	mm	-	
	r_{\min}	0.3	mm	-	
	W	5	mm	内六角槽的公称尺寸	
	重量	m	45	g	质量
	锁紧力矩	M_A	15	Nm	螺母的锁紧力矩
基本额定载荷	$C_{r w}$	6200	N	滚轮的有效额定动载荷 (径向)	
	$C_{0r w}$	9200	N	滚轮的有效额定静载荷 (径向)	
疲劳极限载荷	$C_{ur w}$	1210	N	疲劳极限载荷	
极限转速	$n_{D G}$	2600	r/min	转速 (脂润滑下连续运转)	
说明		NIPA1X4.5		紧配合润滑嘴 轻压配合润滑嘴松散提供。 只能使用所提供的润滑油嘴。	

INA KRV22-PP图片

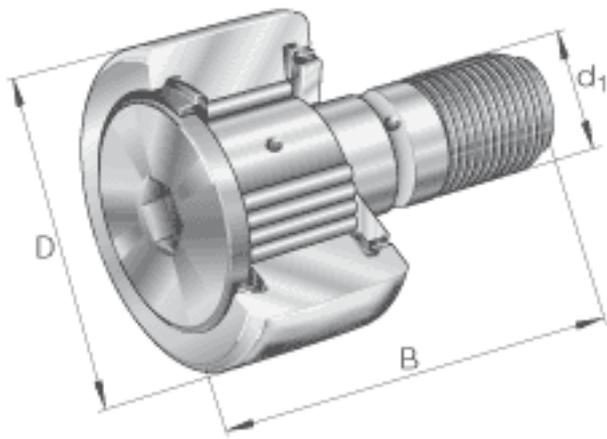

参考资料:<http://www.sozhou.com/p/ce2b86b2.html>